

Automatic Glycohemoglobin Analyzer

ADAMS A1c

HA-8190V



Two modes with shorter TAT

• Fast mode measures a sample in 24 seconds and variant mode* in 58 seconds

Measurement speed in Variant mode becomes now fast enough for routine testing. First screening of a patient is recommended in Variant Mode. Follow-up visits can now be performed more efficiently.*2

- *1 Variant mode: Capable of detecting HbE and HbD by separating variant hemoglobins HbS and HbC.
- *2 Need to operate with LIS.

Improved usability

Saves labor for aligning sample tubes

Sample tubes rotate automatically for barcode reading, eliminating work flow to align the tubes.

Different racks for different purposes

(Anemia rack)

By using anemia rack, sample is identified and measured as anemia sample without any special operation.

This prevents error that indicates abnormally low hemoglobin value.


(Pair rack)

Hemolysis sample or small sample volume can be measured in a sample cup.

Pair rack can have a barcode labeled-sample tube and a sample cup identified as a pair, contributing to safety aspects by preventing mix-up and streamlined work flow.



Identified as a set

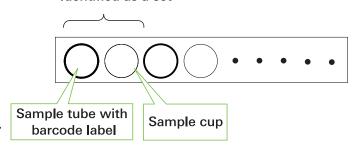

Specifications	
Samples	Whole blood or hemolysis sample
Measurement items	HbA1c (stable HbA1c), HbF
	(In Variant mode, HbS and HbC can be separated and
	HbE and HbD can be detected)
Measurement principle	Reverse-phase cation exchange chromatography
Measurement wavelengths	420nm/500nm (Dual-wavelength colorimetry)
Resolution	0.1% Ratio. 1mmol/mol
Sample consumption	Approx. 8 μ L (whole blood)
Processing speed	Fast mode : 24 seconds per sample
	Variant mode : 58 seconds per sample
Required sample	Sample tube : 10mm or above from the bottom of
volume	sample tube
	Sample cup : 400 μ L or above
Sample container	Sample tube : (φ 13 or 15) x (75 - 100mm)
	Sample cup : 500μ L or above

Number of samples loaded	One-way transportation: Maximum of 50 samples
1	Loop transportation : Maximum of 100 samples
	Loop transportation: Waximum or 100 samples
Display	Color LCD (with touch screen)
Built-in printer	Thermal printer with 58mm thermal paper
Memory capacity	900 test results (including calibration results)
External output	Serial 1 port (Can be optionally used as an Ethernet
	port)
Measurement conditions	Temperature : 10 - 30℃
	Humidity: 20 - 80%RH (No condensation)
Power consumption	300VA
Dimensions	530(W)x530(D)x530(H)mm
	* Not including the projection portions, eluent packs
	and hemolysis washing solution bottle
Weight	Analyzer : Approx. 41kg
	Sampler unit : Approx. 4kg

arkray global business, inc.

Yousuien-nai, 59 Gansuin-cho, Kamigyo-ku, Kyoto 602-0008, JAPAN TEL 81-75-662-8979 FAX +81-75-431-1202

